


. 1.

Eó

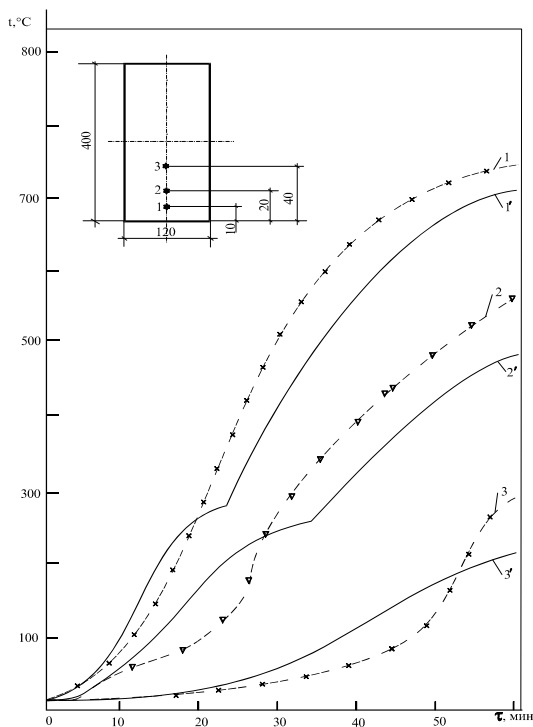


.2.

1, 2, 3

. 1,2,3 -

4-
; 1', 2', 3' -

$$T|_{E=E_2} = 0, \quad \frac{\partial T}{\partial n}|_{E=E_2} = 0. \quad (8)$$

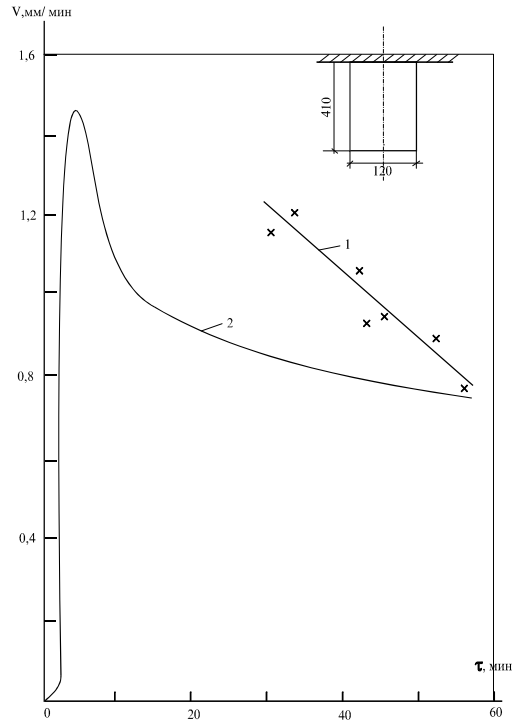

.3.

3-

. 1-

/2/;

2 -

ó

N834

()

[1]:

$$T - T_0 = 345 \lg(8\tau + 1),$$

(9)

ó

, K; τ ó

(9)

. 2

120x400

[2].

. 2

($t < 300^\circ\text{C}$),

150°

IBM-

300 °C),

($t^* =$

120x410

1. 1985. 6 216 .

2. 1984. 6 256 .

624.093

(70%), ISI [6, 7].

Marshalla,

[2, 5, 8].

(BTDC).

[5, 8]. (. 1).

1.7 P (Puaz) ó

, 6 P ó

140

°C,

- SBS ó 165 °C;
- EVA ó 160 °C;
- GUMG, GUMD ó 177 °C.

SBS (

EVA (

(

GUMG).

D-70.

PN-74/S-96022.

2/6, 6/11, 11/16,

[1, 2, 3, 4].

1.

	[°C]		[°C]		
	(6 P)	(1.7 P)	Min (25 P)	Opt. (6 P)	Max (1.7 P)
1. D-70	123	144	102	123	144
2. D-70 + 5% SBS	142	166	118	142	166
3. D-70 + 5% EVA	140	164	116	140	164
4. D-70 + 15%	163	177	135	149	
5. D-70 + 17% + 3%	163	177	135	149	

().